


DATE _____ PROJECT _____ FIRM _____ TYPE _____

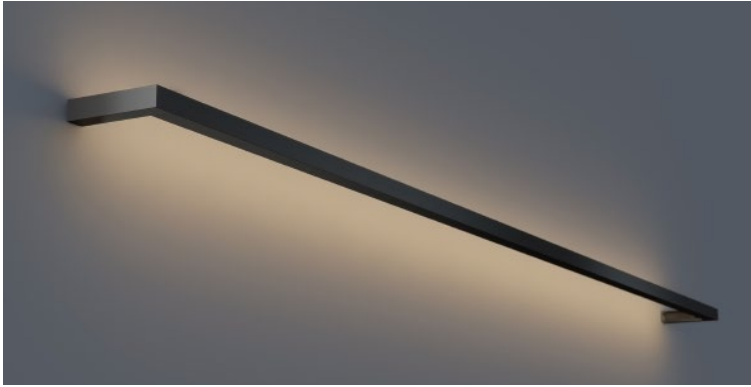

Linear, architectural wall sconce with mud-in mounting plates.

FEATURES

- Indirect (wall-facing) Illumination
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 2700K, 3000K, 3500K & 4000K Color Temperatures Available
- Available with PoE

APPLICATIONS Offices, Lobbies, Retail Stores, Classrooms, Reception Areas & Corridors

CONSTRUCTION Extruded Aluminum Housing with 3" Mounting Arms and Steel 'Mud-In' Plates | **OPTICS** Extruded High Transmission Satin Acrylic Lens with No LED Imaging

WARRANTY 5 Year Limited Warranty (Covers Standard Components) | **FINISH** Standard Powder-Coated Black. Custom RAL Colors Available

FIXTURE RATINGS & CERTIFICATIONS Union Made ETL Listed | Made In The USA Damp Location Rated




DRIVERS & SENSORS

For Wiring Diagrams and Sensor Information Click [Here](#)



ELECTRICAL Remote Driver with 0-10V Dimming Standard

EXTRUSION DIMENSIONS



LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	5 W/ft	175lm/ft
Low (LTG2)	3 W/ft	105lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

ORDERING 1 2 3 4 5 6 7 8

- 1 - FIXTURE IDM** MYOJO
- 2 - LENGTH** 2 - 2 ft, 4 - 4 ft, 6 - 6 ft, X'-X" - Specify Length Up to 6' Max (4" Increments)
- 3 - COLOR TEMP** 27 - 2700K/90 CRI, 30 - 3000K/90 CRI, 35 - 3500K/90 CRI, 40 - 4000K/90 CRI
- 4 - LED SYSTEM** LTG1 - Standard, LTG2 - Low
- 5 - VOLTAGE** UNV - Universal (120/277V)
- 6 - DRIVER (Remote)** DB - Standard Dimming (0-10V), DB1% - 1% Dimming (0-10V), DB.1% - 0.1% Dimming (0-10V), LTEA - Lutron 2-wire 1% Dimming (120V only), LDE1 - Lutron Digital EcoSystem, LDE5 - 5 Series EcoSystem; 5% Dimming, PoE - Power over Ethernet. Consult Factory for Compatibility

- 7 - FINISH** BLK - Black (Standard), W - White, CC - Custom Color (provide RAL#)
- 8 - MOUNTING** WM - Wall Mount