

Maxigobo 200



Compact Power, Full Creativity

Don't let its size fool you.

The **MaxiGOBO 200** delivers vibrant, high-precision gobo projection in a lightweight, rugged package.

Perfectly suited for both indoor and outdoor use, its IP65-rated housing and high-strength aluminum construction ensure durability and stability in any setting.

With five interchangeable beam angles, an optional 10°–50° zoom, and a six-pattern rotating gobo wheel, this **200W** LED projector offers exceptional versatility for scenic projection, signage, and branding.

Designed for fast installation with a swivel bracket and intuitive operation, it's the ideal choice for projects where space is limited but impact is essential.



















Maxigobo 200

Specifications

Working Voltage: AC110-240V

Power : **200W**

Electrical Shock Protection: Class I

Control Protocol: DMX512, Auto

Light Source: **LED**

Color Temperature: 7500K

Beam Angle : 10° / 20° / 30° / 45° / 60° . Optional 10° ~ 50° zoom

Effect: 6 rotating full-colour gobos

Housing : **Aluminium**Installation : **Bracket**

Weight: **5 kg**IP Rated: **IP65**

Life: > 40000 hrs

Efficiency: ≥ 30lm/w

Channels: 10

Certification: CE.ROHS

Features
















Finishes





Dimensions (mm)

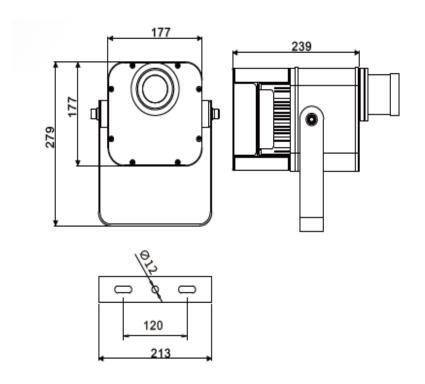

Gobos size (mm)

OD: 25.8

ID: 20

Thickness: 1.1





MaxiGOBO

Channels (DMX 512 Configuration)

Channel	Function	Value	Description
Ch 1	Strobe	0 - 7	Turn off
		4 - 75	Strobe 1
		76 -145	Strobe 2
		146 - 215	Strobe 3
		216 - 255	Turn on
Ch 2	Dimmer	0 - 255	Linear dimmer
Ch 3	Gobo rotation	0 - 9	Gobo 1
		10 - 19	Gobo 2
		20 - 29	Gobo 3
		30 - 39	Gobo 4
		40 - 49	Gobo 5
		50 - 59	Gobo 6
		60 - 69	Gobo 1 shake slow to fast
		70 - 79	Gobo 2 shake slow to fast
		80 - 89	Gobo 3 shake slow to fast
		90 - 99	Gobo 4 shake slow to fast
		100 - 109	Gobo 5 shake slow to fast
		110 - 119	Gobo 6 shake slow to fast
		120 - 149	From fast to slow positive flow
		150 - 179	From slow to fast reverse flow
		180 - 217	Dwell time from fast to slow positive flow
		218 - 255	Dwell time from slow to fast reverse flow
Ch 4	Gobo Auto-rotation	0 - 127	0 - 360°
		128 - 190	From fast to slow positive flow
		191 - 192	Stop
		193 - 255	From slow to fast reverse flow
Ch 5	Auto-rotation Fine	0 - 255	/
Ch 6	Zoom	0 - 255	From small to large
Ch 7	Zoom fine	0 - 255	From small to large
Ch 8	Focus	0 - 255	From far to near
Ch 9	Focus fine	0 - 255	From far to near
Ch 10	Reset	200 - 209	Reset all motors in more than 6 seconds

Certifications





MaxiGOBO 200



MaxiLED Lighting